
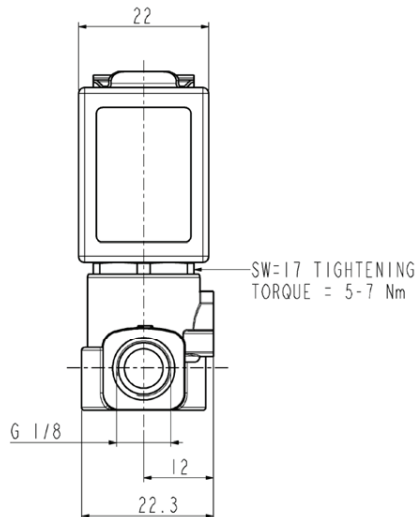
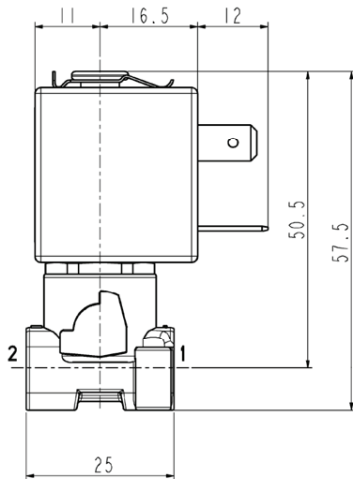



ASCO™ SOLENOID VALVE

2 WAYS NORMALLY CLOSED – DIRECT ACTING - G 1/8

SERIES
L194

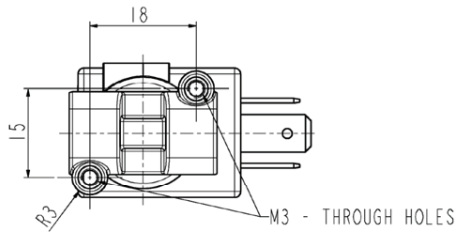

General Features

The flow rate is proportional to the input electric signal.
Suitable to shut off gaseous fluids (verify the compatibility of fluid with material in contact).
Overleaf we show one chart of flow rate/electric signal at 6 bar inlet pressure.

Technical Features	
Maximum allowable pressure (PS)	50 bar
Fluid temperature	-10°C +140°C (EPDM) 0°C +130°C (FPM)

Materials in Contact with Fluid	
Body	Brass
Sealing	EPDM - FPM
Internal components	Stainless steel
Seat	Brass
Guide assembly	Stainless Steel


Coil	ZB10A	ZB12A
Approval	/	UL and CSA
Encapsulation material	PA fiberglass reinforced	PET fiberglass reinforced
Insulation class	F (155°C)	
Ambient temperature	-10°C +60°C	
Continuous duty	ED 100% (see note "A" overleaf)	
Electric connection	DIN 46340 - 3 poles plug connector	
Protection degree	IP 65 (EN 60529) with plug connector	IP 67 (EN 60529) with plug connector
Voltages	DC	12-24V (+10%)

Port size ISO 228	Orifice size (mm)	Inlet differential pressure (bar)		Series and type		Power absorption			Sealings	Notes	Weight (kg)
		Min	Max	Valve	Coil	AC (VA)		DC (W)			
						Inrush	Holding				
G 1/8	1,6	0	6	L194D01	ZB10A ZB12A	-	-	5,5	EPDM	-	0,160
				L194V01					FPM		

Notes

- Sealings: EPDM = Ethylene-propylene elastomer. FPM = Fluoro-carbon elastomer
- Contact us for different pressure ratings and different proportionality features (flow rate/electric signal)
- ZB12A coils fitted with sealing gasket underneath and on the upper part.

REFERENCE CURVE WITH INLET PRESSURE P1 = 6bar
(dehumidified and non-lubricated air and valve in vertical position)
Reference coil 24V DC
(See note "A")

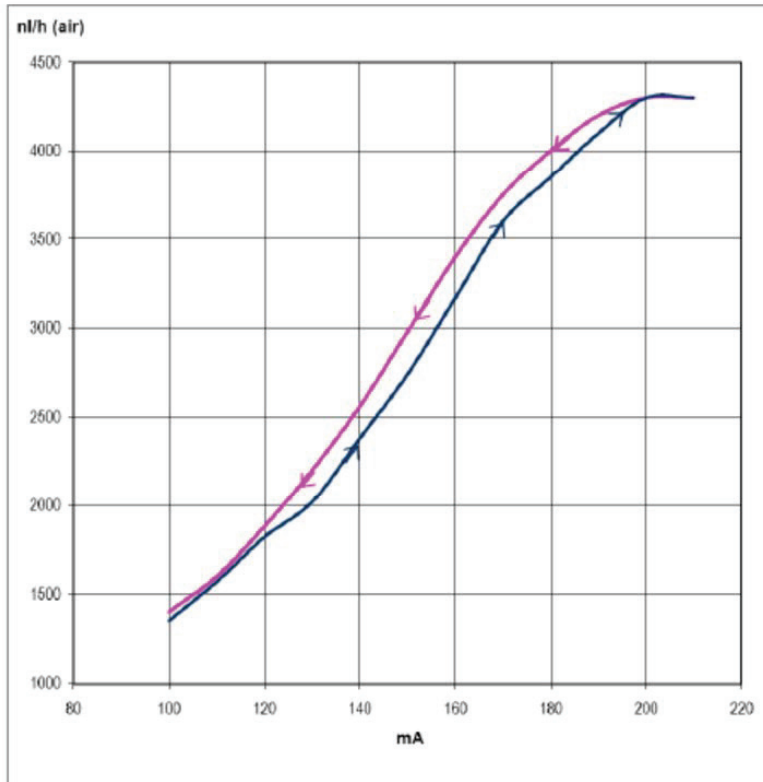

Installation

- Solenoid valve can be mounted in any position; vertical with coil upwards preferred.

NOTE "A"

It is necessary to keep the current circulating in the coil constant, so as to maintain the solenoid valve in any pre-determined position. In case the solenoid valve is energised by voltage variation, it has to be considered that the resistance of winding increases because of the continued energizing and consequently the power decreases. Therefore, it is necessary to compensate such power decrease by increasing the voltage to re-establish the initial current value.

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST