


A miniature isolation valve with an interchangeable hard or soft seat for pressures to 6000 psig (414 barg).

### General Application

The H5 mini valves facilitate safe, compact and economical installations and are excellent for straight isolation applications.

### Features

- Packing below threads (O-ring bonnet) prevents lubricant washout, thread corrosion, process contamination and eliminates galling.
- Easily adjustable packing decreases replacement downtime and increases valve life.
- Safety back seating prevents stem blowout or removal during operation and provides a metal-to-metal secondary stem seal while in the fully open position.
- ENC plated 316 SS prevents galling or freezing of stem threads.
- Rolled stem, bonnet and male NPT threads provide additional strength.
- Mirror stem finish in the packing area enables smooth operation and extends packing life.
- One-piece handle design prevents loss due to vibration or during maintenance.
- Soft or metal seat for bubble-tight shutoff is field-replaceable for easy maintenance.
- Extended valve life: damaged soft seat can be removed, leaving a metal seated valve.

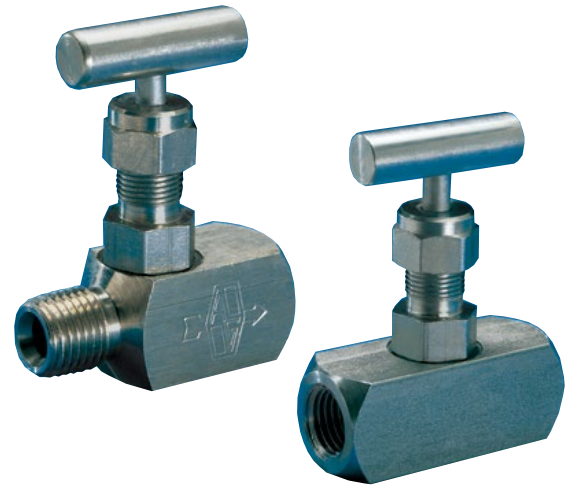


### Technical Data

<b>Materials</b>	CS, 316 SS, Brass, Hastelloy®
<b>Seats</b>	Metal or soft
<b>Connections Inlet</b>	1/4" NPT
<b>Connections Outlet</b>	1/4" NPT
<b>Pressure (max)</b>	6000 psig (414 barg)
<b>Temperature (max)</b>	1000°F (538°C)


### H5 Specifications

#### Dimension: inches (mm)

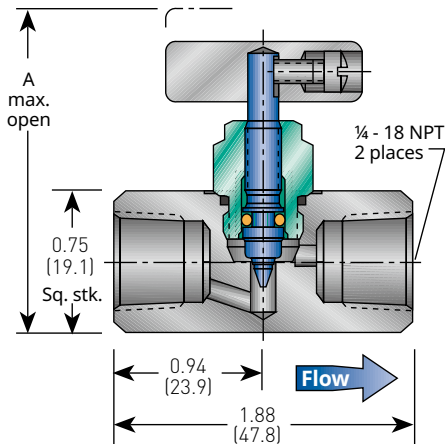


Maximum Open - Dimension A

O-ring	PTFE	Graphite
2.00 (50.8)	2.60 (66.0)	3.07 (78.0)

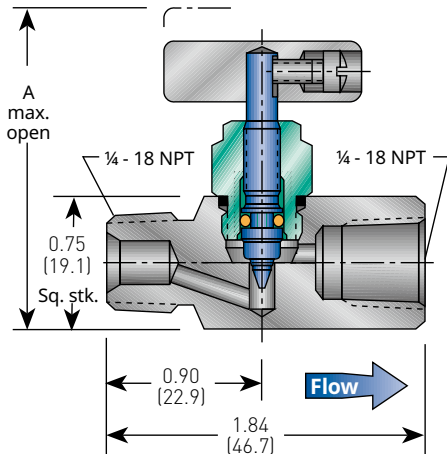

Maximum Open - Dimension A

O-ring	PTFE	Graphite
2.00 (50.8)	2.60 (66.0)	3.07 (78.0)

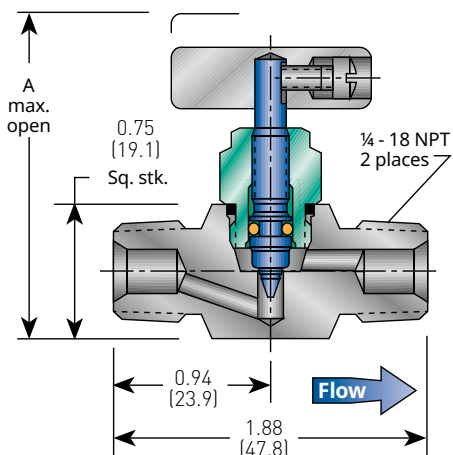

Maximum Open - Dimension A


O-ring	PTFE	Graphite
2.00 (50.8)	2.60 (66.0)	3.07 (78.0)

#### NOTES

1. Approximate valve weight: 0.5 lb (0.23 kg). Seat orifice size 0.136 inch (3.5 mm) diameter.
2. Valve Cv soft seat 0.27 maximum.  
Valve Cv hard seat 0.31 maximum.


## H5 Specifications

### Dimension: inches (mm)

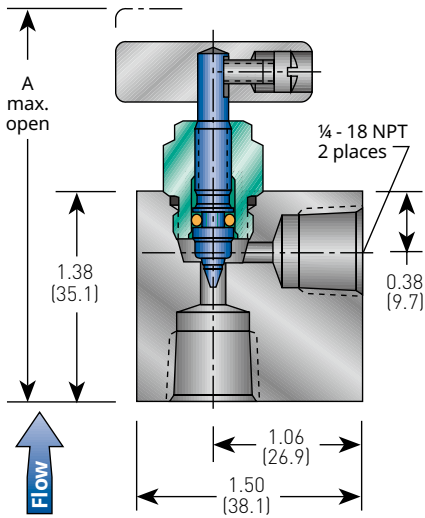

#### Maximum Open - Dimension A

O-ring	PTFE	Graphite
2.64 (67.1)	3.23 (82.0)	3.71 (94.2)

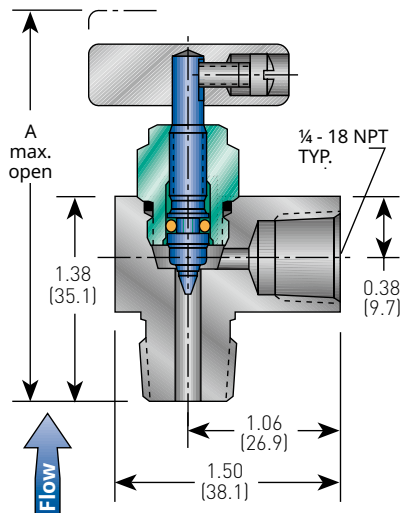

#### Maximum Open - Dimension A

O-ring	PTFE	Graphite
2.66 (67.6)	3.26 (82.8)	3.73 (94.7)

#### NOTES

1. Approximate valve weight: 0.5 lb (0.23 kg). Seat orifice size 0.136 inch (3.5 mm) diameter.
2. Valve Cv soft seat 0.27 maximum.  
Valve Cv hard seat 0.31 maximum.

## Bonnet Assembly Options

The H5 features the mini-valve bonnet assembly, with a compact design and a one-piece rotating stem which is 'V' tipped with a shoulder for use as a metal or soft seated valve. The stem threads are rolled and lubricated to prevent galling and reduce operating torque.

The mini-valve bonnet comes in three designs:

- An adjustable PTFE stem packed bonnet which is suitable for panel mounting via external bonnet threads.
- O-ring bonnet assemblies which use a FKM O-ring seal below the stem thread.
- A graphite-packed bonnet suitable for temperatures of up to 1000°F (538°C) which is available for SS valves only.

## Standard Materials - Metal Hard Seat

Valve	Body	Bonnet	Stem	Packing	Seat	Handle <sup>(2)</sup>
CS <sup>(1)</sup>	A108	A108	A581-303	PTFE or FKM O-ring	Integral	Round
316 SS	A479-316	A479-316	A276-316	PTFE, FKM O-ring or GRAFOIL®	Integral	Tee
Brass	B16	B16	A581-303	PTFE or FKM O-ring	Integral	Round
SG <sup>(3)</sup>	A479-316	A479-316	Monel® R405	PTFE or FKM O-ring	Integral	Tee
SG <sup>(5)</sup>	Hastelloy® C-276	Hastelloy® C-276	Hastelloy® C-276	PTFE or FKM O-ring	Integral	Tee

## Standard Materials - Soft Seat


Valve	Body	Bonnet	Stem	Packing	Flow washer	Seat	Handle <sup>(2)</sup>
CS <sup>(1)</sup>	A108	A108	A581-303	PTFE or FKM O-ring	A479-316	Delrin® <sup>(4)</sup>	Round
316 SS	A479-316	A479-316	A276-316	PTFE or FKM O-ring	A479-316	Delrin	Tee
Brass	B16	B16	A581-303	PTFE or FKM O-ring	A479-316	Delrin® <sup>(4)</sup>	Round
SG <sup>(3)</sup>	A479-316	A479-316	Monel® R405	PTFE or FKM O-ring	A479-316	Delrin	Tee
SG <sup>(5)</sup>	Hastelloy® C-276	Hastelloy® C-276	Hastelloy® C-276	PTFE or FKM O-ring	Hastelloy® C-276	Delrin	Tee

### NOTES


1. CS is Zinc TCP plated to prevent corrosion.
2. Tee handle is SS; round handle is CS.
3. SG (Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions ≤ 50 mg/l [ppm]) and NACE MR0103.
4. PEEK available.
5. SG3 (Sour Gas) meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions > 50 mg/l [ppm]).

Pressure vs. Temperature

Pressure vs. Temperature - CS and 316 SS valves

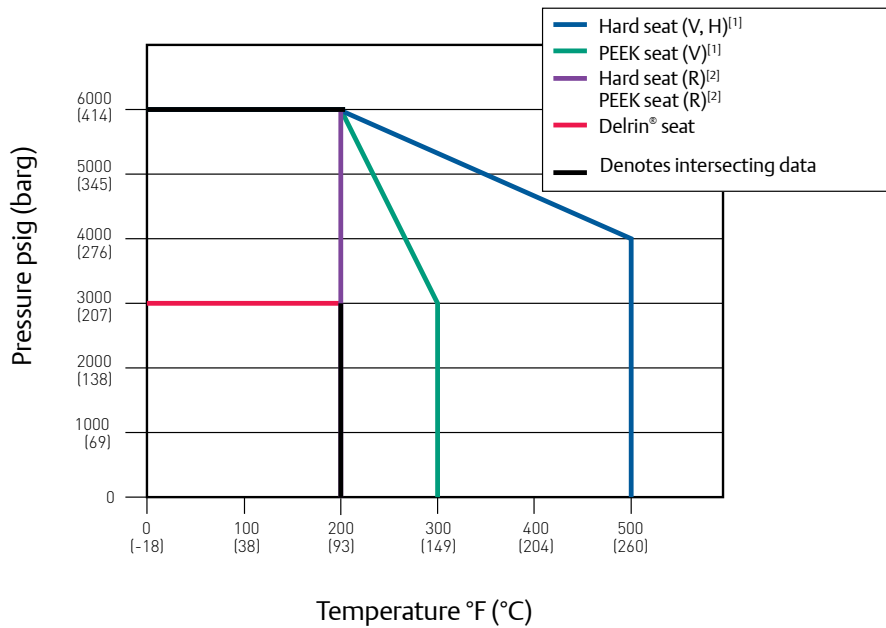

Pressure vs. Temperature - Brass valves

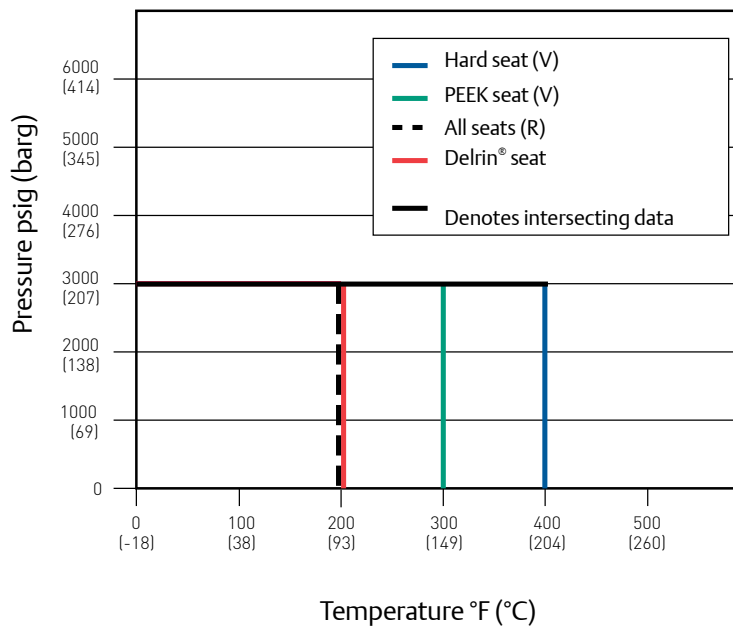


NOTES

- (V or H) = with PTFE or Graphite bonnet assemblies.
- (R) = with O-ring bonnet assembly.
- Minimum Temperature  
 Carbon Steel and O-ring -20°F (-29°C)  
 Delrin<sup>®</sup> Seat -40°F (-40°C)  
 PTFE Packed 316SS, PEEK  
 Integral/hard metal seats -72°F (-57°C)

**Pressure vs. Temperature**

Pressure vs Temperature - 316 SS valves with Graphite bonnet

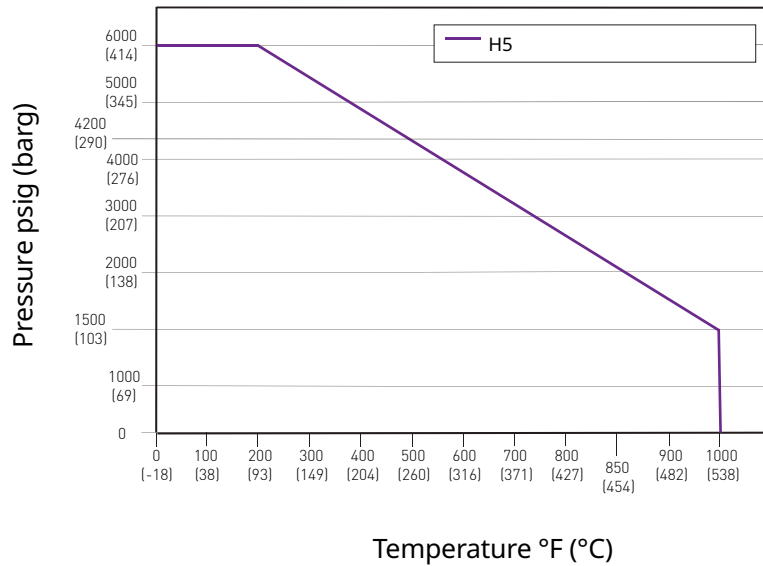

**NOTES**

- 1. (V or H) = with PTFE or Graphite bonnet assemblies.
- 2. (R) = with O-ring bonnet assembly.

**Pressure and Temperature Ratings<sup>(1)</sup>**


Seat	PTFE bonnet		GRAFOIL® bonnet <sup>(2)</sup>
	CS and 316 SS valves	Brass valves	316 SS valves
Hard	6000 psig at 200°F (414 barg at 93°C)	3000 psig at 400°F (207 barg at 204°C)	6000 psig at 200°F (414 barg at 93°C)
	4000 psig at 500°F (276 barg at 260°C)		1500 psig at 1000°F (103 barg at 538°C)
Delrin®	3000 psig at 200°F (207 barg at 93°C)	3000 psig at 200°F (207 barg at 93°C)	
PEEK	6000 psig at 200°F (414 barg at 93°C)	3000 psig at 300°F (207 barg at 149°C)	
	3000 psig at 300°F (207 barg at 149°C)		
<b>O-ring bonnet</b>			
Hard	6000 psig at 200°F (414 barg at 93°C)	3000 psig at 200°F (207 barg at 93°C)	
Delrin®	3000 psig at 200°F (207 barg at 93°C)	3000 psig at 200°F (207 barg at 93°C)	
PEEK	6000 psig at 200°F (414 barg at 93°C)	3000 psig at 200°F (207 barg at 93°C)	

**NOTES**


- 1. Pressure and temperature ratings are not shown on valve body.
- 2. Graphite packed bonnet; 316 SS only. 1000°F (538°C)

Dimension: inches (mm)


Optional Panel Mounting Nut<sup>(1)</sup>

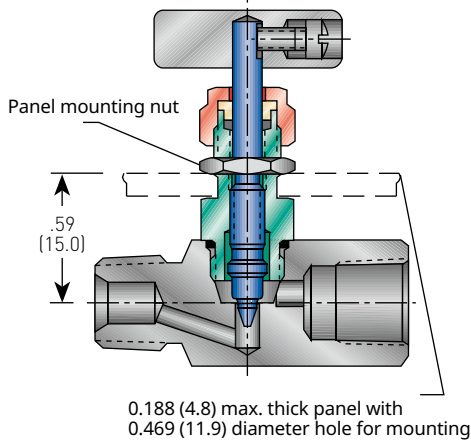


Optional Soft Seat<sup>(2)</sup>



Optional Phenolic Handles<sup>(2)</sup>

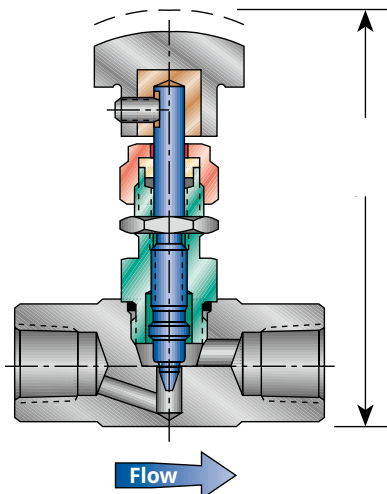

Optional Grafoil Packed Bonnet

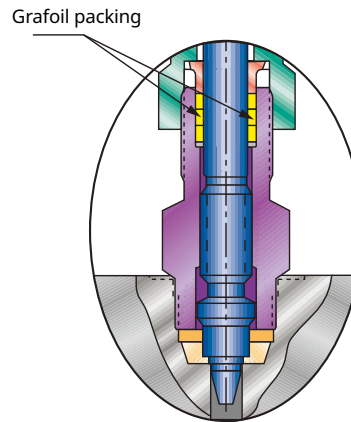

Phenolic handles are available in 1 inch (25 mm) diameter. Colors available are green, red, and black. Phenolic handles facilitate repeatable flow control, as well as enhancing the appearance of panels, sample cylinders and other associated products requiring premium performance throttling and/or isolation valves. Maximum open dimension of any H5 with Phenolic handles is calculated by adding 0.4 inch (10.2 mm) to the 'A' reference dimension for PTFE stem seal on page 2.

NOTES

1. Available with PTFE packed bonnet.
2. Available on all H5 products.

Selection Guide - H5

H5	V	D	S	-22	-SG	
BASIC SERIES	PACKING	SEAT	MATERIAL	CONNECTIONS	OPTIONS	
H5	V PTFE (standard for SS)	I Integral	B Brass (round Handle Standard)	2 ¼ inch FNPT (outlet) x ¼ inch FNPT (inlet)	HD Hydrostatic testing (100%) (MSS-SP-61)	
	R O-ring	D Delrin®	C Carbon steel (round Handle Standard)	2A ¼ inch FNPT (outlet) x ¼ inch FNPT (inlet) angle	MS Monel® stem	
	H GRAFOIL® (316 SS only) 1000°F (538°C) max	E PEEK	S 316 SS (Tee Handle Standard)	2M ¼ inch MNPT (outlet) x ¼ inch MNPT (inlet)	OC00 Oxygen cleaning (316 SS only)	
				J Hastelloy®	22 ¼ inch FNPT (outlet) x ¼ inch MNPT (inlet)	PHB Phenolic black handle
				22A ¼ inch FNPT (outlet) x ¼ inch MNPT (inlet) angle	PM Panel mount (PTFE packed only)	
				SG Sour Gas meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions ≤ 50 mg/l (ppm)) and NACE MR0103-2005 (SS only)		
SG3 Sour Gas meets the requirements of NACE MR0175/ISO 15156 (for chloride conditions > 50 mg/l (ppm))						
				RH Round Handle (standard on Brass or CS valves)		
				TH Tee Handle (standard on SS Valves)		

NOTES

1. Delrin® is a registered trademark of E.I. du Pont de Nemours and Company.
2. Grafoil® is a registered trademark of GrafTech International.
3. Hastelloy® is a registered trademark of Haynes International, Inc.
4. Monel® is a registered trademark of the Special Metals Corporation.

Availability, design and specifications are subject to change without notice. © 2024 Emerson Electric Co. All rights reserved.