


# Rosemount TGU 65

## Tank Radar Gauge, Still Pipe Antenna

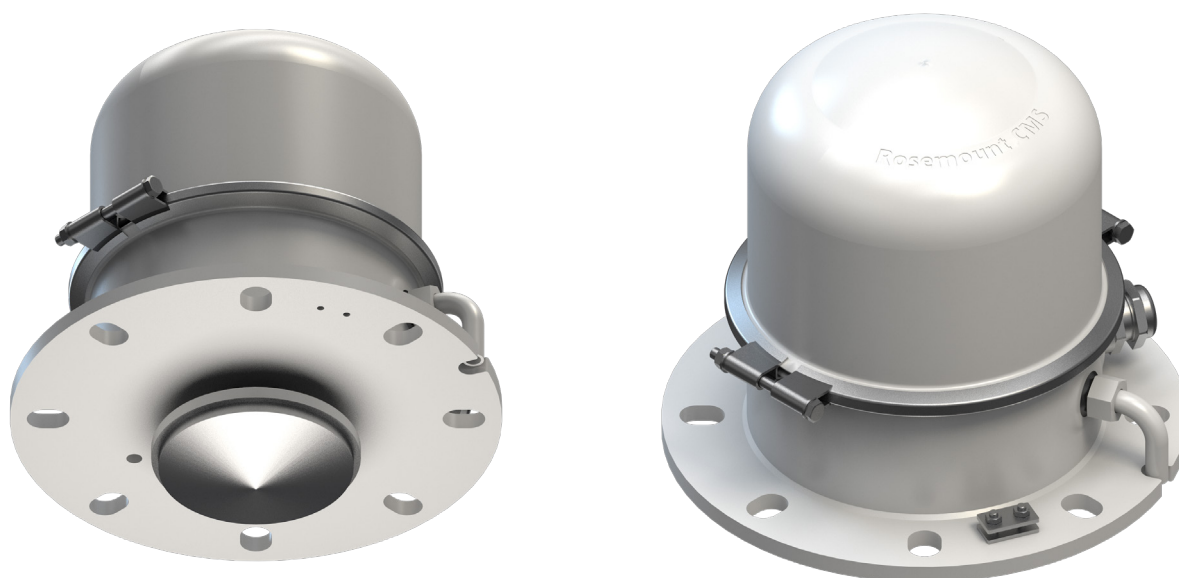

Rosemount TGU 65 Tank Radar Gauge, Still Pipe Antenna is a marine pipe guided level gauge that is integrated in the Rosemount Cargo Monitoring System (CMS). It is designed to be used in harsh conditions on tankers and offshore installations, and has a superior robustness and accuracy under all tank conditions.

Rosemount TGU 65 Tank Radar Gauge, Still Pipe Antenna comes in two versions. The TGU 65C is the best choice for measuring ullage on tankers and marine applications, and the TGU 65S is ideal for offshore market needs.

**TGU 65 can have up to two independent measurement channels in the same unit.**

- Ideal solution for measuring ullage in narrow tanks
- Accurate measurement of sea water draft
- Reliable measurement that keeps you operating under adverse conditions in tank
- Robust, withstands harsh conditions on deck
- Easy to install, light weight
- 10 GHz FMCW tank radar gauge, with still pipe antenna and low-loss mode to withstand build up and deposits inside the pipe
- Optional integrated vapor pressure sensor with optional test valve
- Optional level redundancy measurements
- Optional independent high level alarm measurements

# Description

## TGU 65

The Rosemount TGU 65 Tank Radar Gauge, Still Pipe Antenna, is suited for installation on general tanks with a tank height of up to 35 meter. The unit is equipped with an array antenna, and shall be mounted in a 5" or 6" still pipe. The signal processing and special low-loss mode keeps the TGU 65 operating even if deposits build up inside the pipe. The gauge is intrinsically safe and operates based on 10 GHz FMCW radar technology.


## TGU 65C

The TGU 65C is the ideal choice for measuring ullage in narrow slop tanks and residual tanks on tankers and marine applications, where it can be difficult to find free space for the TGU 68C.

## TGU 65S

The TGU 65S fits the offshore market needs for narrow tanks and sea water draft applications. The TGU 65S has a wider range of options available than the TGU 65C, such as an extended range for up to 65 m.

## Rosemount Cargo Monitoring System

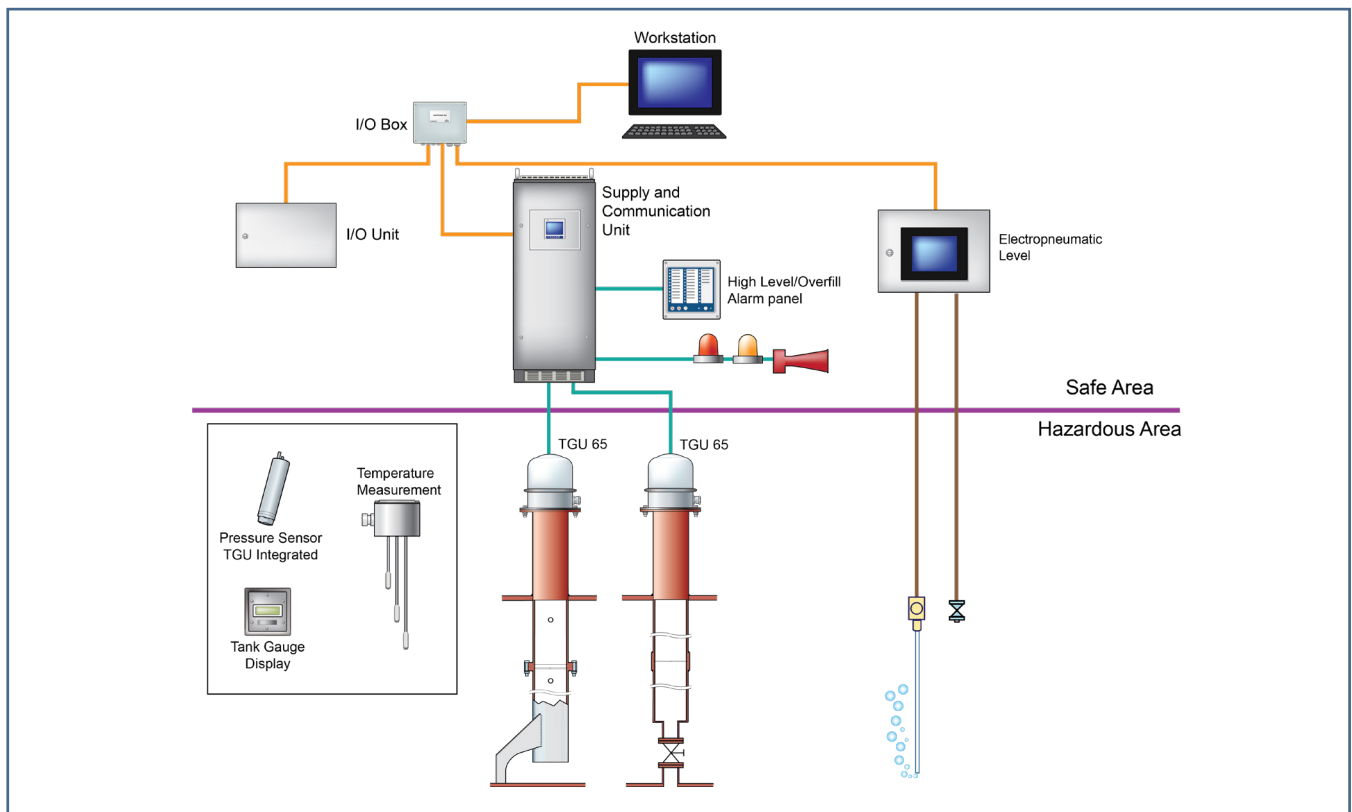

### Connections

One digital bus connection to the Rosemount SCU 51 Supply and Communication Unit in the control room per level measurement channel.

Optional digital bus connections to:

- Rosemount TMU 51/53 Temperature Measuring Units
- Rosemount TGD 51 Tank Gauge Display

### Redundancy and High Level/Overfill Options

The gauge is as standard equipped for level measurements, but is prepared for optional redundant level or independent high level or overfill alarm measurements.

### Still Pipe

The Rosemount TGU 65, Tank Radar Gauge Still Pipe Antenna needs a pipe to guide the microwave signal. The pipe can either be a 5" or a 6" pipe, and they are normally yard supplied. The still pipe needs to have venting holes to allow level to equalize between still pipe and tank. The manufacturing method for the pipe can either be:

- A. Flanged pipe segments joined together by bolt and nut
- B. Pipe segments welded together butt to butt
- C. Pipe segments welded together with a sleeve

The radar wave propagates inside the still pipe with a special polarized, low-loss mode making it less sensitive to deposits and contamination inside the pipe. Even so, for the best measurement performance, it is important that the inside of the still pipe is smooth and without irregularities.


The lower end of the pipe will end over the tank bottom in case of tank ullage measurement. For draft installations the pipe enters the sea water with a yard supplied sea valve.

### Radar Principles

The FMCW radar used in Rosemount CMS emits radar waves continuously at a known range of frequencies. The transmitted radar frequency is increased over a time creating a sweep. The reflected signals is then mixed with the transmitted signals creating a low frequency signal that is proportional to the product level. The signals are digitally processed and presents a very accurate reading of the distance to the product level.


#### The main advantages for using radar for tank gauging are:

- Radar waves are extremely robust to any conditions in the tank
- Radar waves are generally not affected by the atmosphere above the product in the tank
- The only part located inside the tank is the antenna without any moving parts
- High reliability
- High accuracy
- With Rosemount CMS, the Tank Gauge Electronics can easily be serviced and replaced during closed tank conditions.

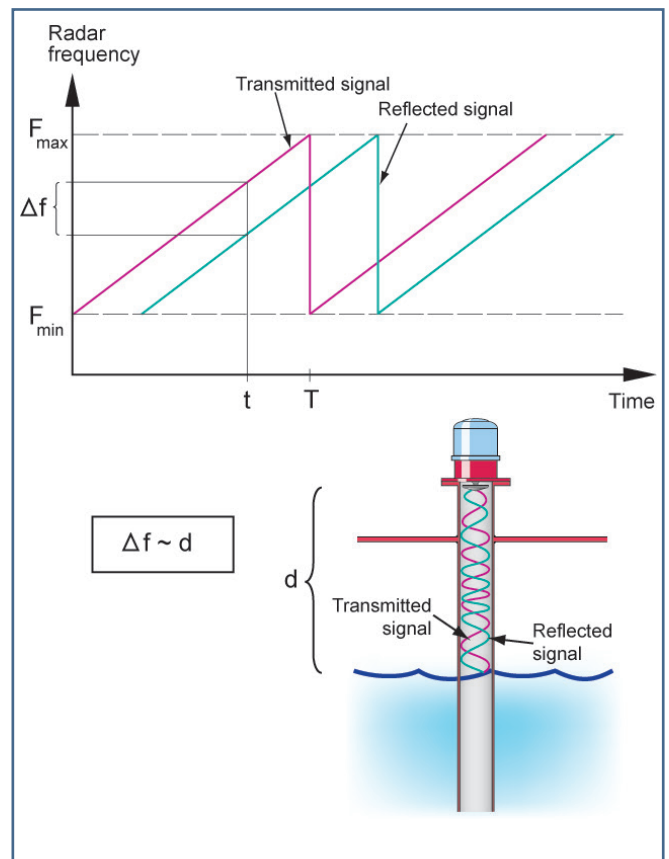

## Technical Specification

TGU 65	
<b>General Specification</b>	
Antenna type	Array antenna for installation on still pipe
Measuring range	0 to 35 m standard 0 to 65 m for TGU 65S <sup>1</sup>
Instrument accuracy	±2 mm <sup>2</sup> (±3σ Conformance)
FMCW centre frequency	10 GHz
Operating temperature in tank	- 40° to +100° C
Operating pressure in tank	-100 to +500 mbar
<b>Still Pipe and Deck Socket</b>	
Still pipe and deck socket	Yard supply
Still pipe dimension	Inner diameter between 5" Array antenna: 124.5 and 134.5 mm 6" Array antenna: 150.3 and 161.5 mm
Still pipe venting	Vented pipe for tank level equalization
Still pipe material	Metallic, according to yard specification. Typically stainless or carbon steel.
Tank installation	Still pipe ends maximum 250 mm from bottom
Draft installation	Sea water valve (yard supply)
Deck socket	Minimum 900 mm extension of still pipe from deck
<b>Electrical Specification</b>	
Cable to control room	Up to 3 cables with two or three twisted pairs with common shield Max length approximately 400 m
Number of cable inlets	1 to 3
Cable diameters	6 to 21 mm
Field bus	Proprietary intrinsically safe
Microwave output power	<1mW
<b>Mechanical Specification</b>	
Flange	Suitable for mounting on JIS 5K-200, DN200, ASME 8", DN 250
Weight	17 kg (35 lbs.)
Material facing tank atmosphere	Stainless steel 316L, PTFE, Fluorsilicone (standard)
Material facing deck	Stainless steel 316L

TGU 65		
<b>Environment Specification</b>		
Ingress protection	IP 66/67	
Ambient temperature	- 40° to +70° C	
Humidity	0 - 100% relative humidity	
<b>Vapor Pressure Option</b>		
Operating range	-100 to 900 mbar	
Instrument accuracy	±3 mbar	
Material facing tank atmosphere	Stainless steel 316L and Alloy C276	
<b>Approvals</b>		
Marine type approvals	ABS, BV, CCS, DNV-GL, KR, LR, NK, RINA	
Explosion protection	Intrinsically safe:	ATEX:  II 1G Ex ia IIC T4 Ga, IECEx: Ex ia IIC T4 Ga INMETRO: Ex ia IIC T4 Ga


1) Maximum range depending on application

2) Operational accuracy in still pipe (typical) ±10 mm. Undefined accuracy below end of still pipe.

Ordering Information		TGU 65C	TGU 65S	Comments
<b>Flange</b>				
	Housing, flange JIS 200A / EN DN200	√	√	
	Housing flange EN DN 250	√	√	
	Housing, flange ASME B16.5 8"		√	
<b>Gasket Material</b>				
	O-ring, fluorsilicone	√	√	
<b>Customer Pipe</b>				
	5 in. / DN 125 Pipe (for antenna ø 120 mm)	√	√	
	6 in. / DN 150 Pipe (for antenna ø 145 mm)	√	√	
<b>Vapor Pressure Sensor</b>				
	Vapor Pressure Sensor, -100 to 900mBar	√	√	Option
	Vapor Pressure Sensor Test Valve	√	√	Option
<b>Measuring Channels</b>				
	Tank Gauge Electronics box 10 GHz, 1 channel	√	√	
	Tank Gauge Electronics box 10 GHz, 2 channels	√	√	
<b>Hazardous Locations Certification</b>				
	ATEX, IECEx Intrinsic Safety TGU 65	√	√	
	INMETRO, Intrinsic Safety TGU 65		√	
<b>Cable Glands</b>				
	Cable gland M20	√	√	Option 1-3 glands
	Cable gland M25	√	√	Option 1-3 glands
	Cable gland M32	√	√	Option 1-3 glands
	Special		√	Option 1-3 glands
<b>Optional Items</b>				
	Protective hose for Cable Gland	√	√	Option
	Flange JIS 5K 40A for Protective hose	√	√	Option
	Flange JIS 5K 50A for Protective hose	√	√	Option
	Flange PN10 DN40 for Protective hose	√	√	Option
	Bolt Kit (gauge socket)	√	√	Option
	Gasket (gauge socket)	√	√	Option
	Metal label (TAG plate)		√	Option
	Calibration certificate		√	Option
	Material traceability certification acc. to EN 10204.3		√	Option
	Extended measurement range		√	Option

√ = Available

# Dimensional Drawings

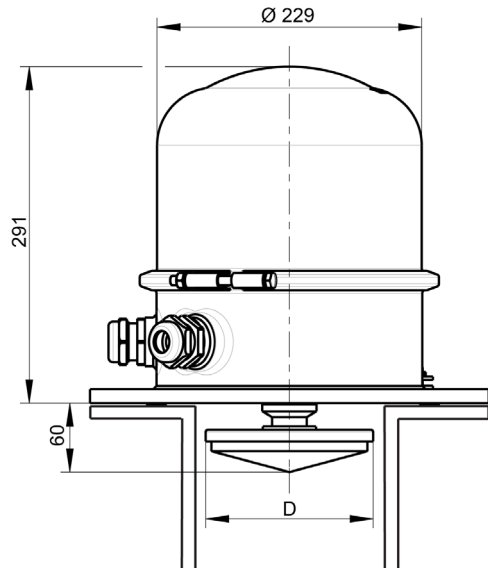

Still Pipe	D
5"	120
6"	145

All dimensions in mm

---

## **About Emerson's Marine Solutions**

Emerson is a world-leading provider of marine solutions with engineering excellence, decades of industry experience and global presence supporting any ship anywhere. All marine systems and solutions are designed especially for the harsh marine environments, engineered and manufactured in-house by our skilled teams of marine engineers. Emerson is well-known in the industry and has more than 50 years' experience with a large installed base and covers well-known marine brands such as Rosemount, Micro Motion and Damcos. Supporting marine customers from a global network of sales and service hubs along the maritime highway.

To learn more about Emerson's marine solutions, visit **[Emerson.com/marine](https://emerson.com/marine)**

To contact Emerson's marine experts, visit **[Emerson.com/marinecontacts](https://emerson.com/marinecontacts)**

The Emerson logo is trademark and service mark of Emerson Electric Co.  
The Rosemount, MicroMotion and Damcos logotypes are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners.

©2023 Emerson. All rights reserved.

