


FloBoss™ 107 Resistance Temperature Device (RTD) Module

The Resistance Temperature Device (RTD) module for the FloBoss™ 107 Flow Manager (FB107) provides the FB107 with the ability to monitor various RTD sensors. An FB107 unit can support a maximum of six RTD modules.

The RTD module monitors the temperature signal from an RTD sensor within a fixed range. The RTD input module provides three channels for measuring the resistance of 2-wire, 3-wire, or 4-wire, 100-ohm, platinum RTD sensors with an alpha equal to $0.00385 \Omega/\Omega/^\circ\text{C}$.


The use of surge protection techniques eliminates the need for fuses on the Input/Output (I/O) modules. This reduces maintenance for remote locations. The I/O modules are self-resetting after a fault clears.

All modules have removable terminal blocks for convenient wiring and servicing. The terminal blocks can accommodate size 16 to 24 American Wire Gauge (AWG).

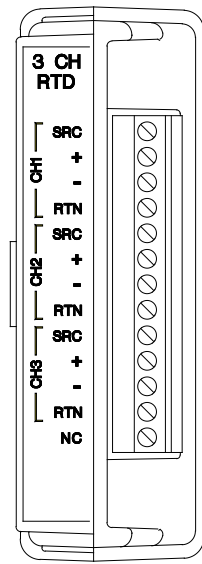


DDC0760A


RTD Module

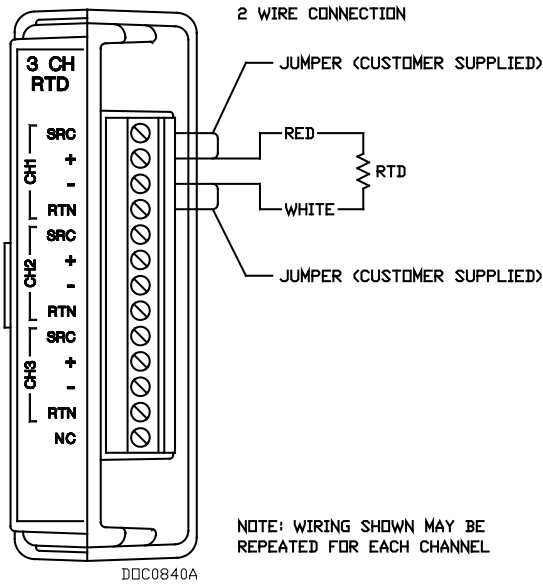

2-Wire Connection
Example RTD Wiring Diagram

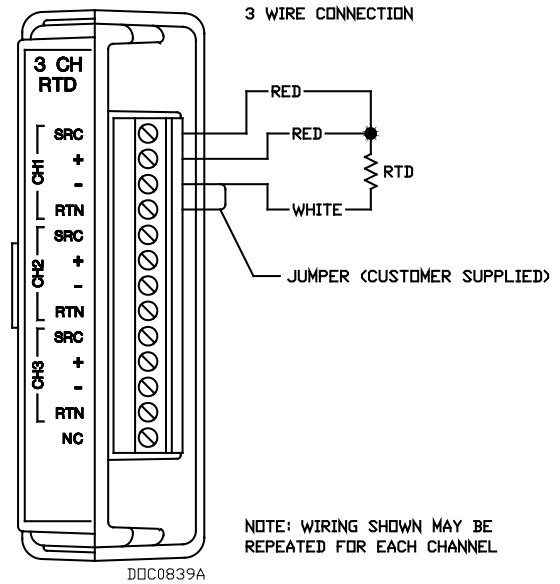


3-Wire Connection
Example RTD Wiring Diagram

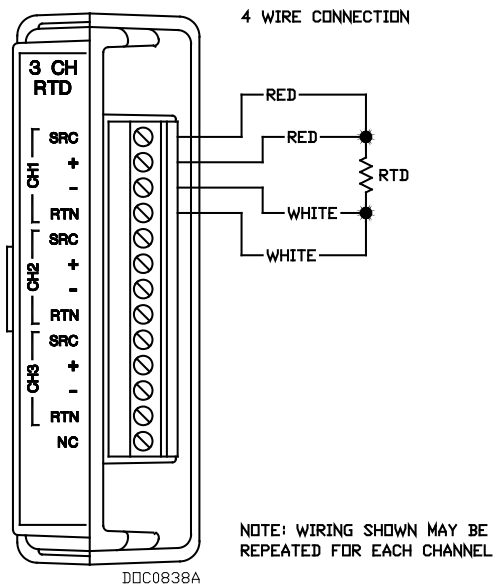

4-Wire Connection
Example RTD Wiring Diagram

FloBoss 107 RTD Module

Field Wiring Terminals

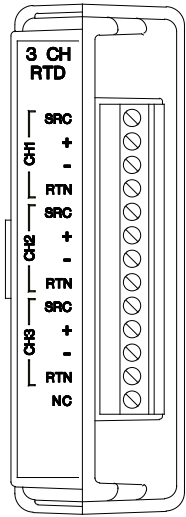

DOC0760A

Terminal	Label	Definition
1	SRC	Source
2	+	Positive
3	-	Negative
4	RTN	Return
5	SRC	Source
6	+	Positive
7	-	Negative
8	RTN	Return
9	SRC	Source
10	+	Positive
11	-	Negative
12	RTN	Return
13	NC	No Connection

Inputs

Quantity	Three channels
Type	2, 3, or 4-wire, 100 Ω, platinum type RTD, using a 24-bit A/D
Default Range	-40 to 400°C (-40 to 752°F)
Full Range Deflection	DIN 43760 standard
Temperature Coefficient	alpha of 0.00385
Fastest Scan Period	50 ms
Absolute Accuracy ¹ at 25°C (77°F):	0.1% of URL after calibration
Absolute Accuracy ¹ Over Operating Temp	0.38% of full scale

Power

Consumption	220 mW
-------------	--------

Physical

Dimensions	82.55 mm H by 25.4 mm W by 127 mm L (3.25 in. H by 1.0 in. W by 5.0 in. L)
Weight	68 g (2.4 oz.)
Wiring	Size 16 to 24 AWG at the removable terminal block

Environmental

Same as the FB107 in which it is installed

Approvals

Same as the FB107 in which it is installed

1. Absolute Accuracy Includes: Linearity, Hysteresis, Repeatability, Stability, Gain, and Offset error.

Headquarters:

Emerson Process Management

Remote Automation Solutions
6005 Rogerdale Road
Houston, TX 77072 U.S.A.
T +1 281 879 2699 | F +1 281 988 4445
www.EmersonProcess.com/Remote

Europe:

Emerson Process Management

Remote Automation Solutions
Unit 8, Waterfront Business Park
Dudley Road, Brierly Hill
Dudley UK DY5 1LX
T +44 1384 487200 | F +44 1384 487258
www.EmersonProcess.com/Remote

North American/Latin America:

Emerson Process Management

Remote Automation Solutions
6005 Rogerdale Road
Houston TX USA 77072
T +1 281 879 2699 | F +1 281 988 4445
www.EmersonProcess.com/Remote

Middle East/Africa:

Emerson Process Management

Remote Automation Solutions
Emerson FZE
P.O. Box 17033
Jebel Ali Free Zone – South 2
Dubai U.A.E.
T +971 4 8118100 | F +971 4 8865465
www.EmersonProcess.com/Remote

Asia-Pacific:

Emerson Process Management

Remote Automation Solutions
1 Pandan Crescent
Singapore 128461
T +65 6777 8211 | F +65 6777 0947
www.EmersonProcess.com/Remote

© 2009-2013 Remote Automation Solutions, a business unit of Emerson Process Management. All rights reserved.

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions division (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions, a business unit of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow, Helicoid, OpenEnterprise, and METCO are trademarks of Remote Automation Solutions. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. Remote Automation Solutions reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by Remote Automation Solutions' terms and conditions which are available upon request. Remote Automation Solutions does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Remote Automation Solutions product remains solely with the purchaser and end-user.