



Low Power Accelerometer with Temperature

Specially designed, high performance, low power accelerometer with temperature output for the AMS 9420 Wireless Vibration Transmitter.

Dynamic Performance	
Temperature Sensitivity	10 mV/°C with - 50°C offset
Acceleration Sensitivity (±15%)	25 mV/g (2.5 mV/m/s ²)
Measurement Range	±80 g (784 m/s ²)
Frequency Range (±3 dB)	1.6 to 10000 Hz (96 to 600000 cpm)
Mounted Resonant Frequency	25 kHz nominal
Broadband Resolution	3 mg rms (29 mm/s ²) (1 to 10 KHz)
Amplitude Linearity	±1% (0 based straight line method)
Transverse Sensitivity	≤7%
Environmental / Safety	
Shock Limit	5000 g pk (49050 m/s ²)
Temperature Range	-40 to 121°C (-40 to 250°F)
Sealing	Epoxy
Enclosure Rating	IP68 / Hazardous Location Approved
Agency Ratings (all standard)	CE Exia IIC T4, AExia IIC T4 Exia IIC T4, 40°≤Ta≤121°C, II 1 G Cl 1 Div 1 (Groups A, B, C, D), CLII Div 1 (Groups E, F, G), CLIII Div1 Cl 1 Div 2 (Groups A, B, C, D), ExnL IIC T4, AExnA IIC T4 Ex nL IIC T4, 40°≤Ta≤121°C, II 3 G
Electrical	
Settling Time	≤2 sec (within 1% of bias)
Discharge Time Constant	≥0.1 sec
Excitation Voltage / Output Bias	5 VDC / 2.3 to 2.7 VDC
Output Impedance	<100 ohms
Case Isolation	>10 ⁸ ohms

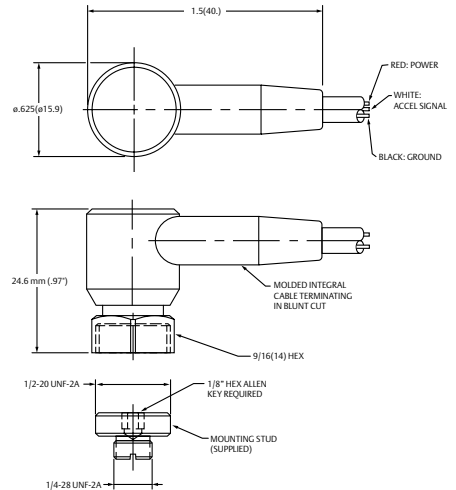

Details shown for Model A0394DI-1

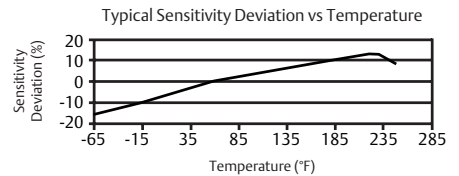

Mechanical	
Weight	23 grams (0.81 oz) Sensor Only
Mounting Stud / Torque	¼-28 NPT / 2.7 to 6.8 Nm (2 to 5 lb ft)
Mounting Hex / Torque	9/16" Flats / 9.5 to 10.8 Nm (7 to 8 lb ft)
Sensor Element / Geometry	Ceramic / Shear
Case Material	Stainless Steel
Connector Type (Side)	Molded Integral Cable/4 Wire/ Tinned Leads
Supplied Accessories	
3 Point Calibration	
Mounting Stud (Part No. MHM-85493)	
Versions ¹	
1. A0394DI-1	Blue Jacket, 9 meter Cable
2. A0394DI-4	Blue Jacket, 29 meter Cable
3. A0394DA-1	Armored, Blue Jacket, 9 meter Cable
4. A0394DA-4	Armored 23 meter, Blue Jacket, 29 meter Cable
5. A0394DAC-1	Armored, PTFE Coated, Blue Jacket, 9 meter Cable
6. A0394DAC-4	Armored 23 meter, PTFE Coated, Blue Jacket, 29 meter Cable

¹Additional lengths may be available as special order.

©2022, Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. The AMS logo is a mark of one of the Emerson family of companies. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while diligent efforts were made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Contact Us
 www.emerson.com/contactus